

NEC MultiSync® LCD8205

82" professional-grade LCD display ideal for corporate and digital signage applications

Enhance your image in a big way. The 82" NEC MultiSync LCD8205 delivers big-screen performance and capabilities for your corporate and digital signage applications. Its sheer size (landscape orientation provides an active screen area of almost six feet in width and more than three feet in height) captures the attention of audiences both near and far. And with full high-definition resolution, lightning-quick response times, the widest possible viewing angles and high brightness/contrast, your images and messaging keep all eyes on the screen. This level of performance makes this display ideal for corporate lobbies and boardrooms, digital signage applications and tradeshow/events, leaving positive, lasting impressions.





- ❑ **High brightness (600 cd/m²)** helps overcome ambient lighting obstacles for distraction-free viewing
- ❑ **Remarkable contrast (2000:1)** provides for staggeringly deep blacks and improved color depth
- ❑ **Thermal protection** includes fan-based technology specially designed to work in both landscape and portrait modes and be controlled locally or remotely. Internal temperature sensors control self-protective circuits, while special self-diagnostics communicate the status of the thermal characteristics.
- ❑ **Protective panel (optional; LCD8205-P)** creates new display opportunities in high-traffic or potentially hazardous environments
- ❑ **TileMatrix™** allows you to create video walls (up to 16 displays in a 4x4 matrix equaling 27 ft. diagonal)
- ❑ **TileComp™** works in tandem with TileMatrix to compensate for the bezel width and create a more seamless video wall
- ❑ **Five picture and audio modes** adjust the picture and sound, optimizing for the best viewer experience
- ❑ **Color temperature adjustable** from 5500 - 9300K, allowing for perfect whitepoint matching across screens as well as matching to source devices
- ❑ **AmbiBright™** technology automatically adjusts the backlight depending on ambient lighting brightness for optimal picture quality and viewing
- ❑ **Landscape and portrait capability** allows for distortion-free display of content in various orientations, creating new application opportunities

Specifications for LCD8205 (LCD8205-P*)

Model	LCD8205
LCD MODULE	
Viewable Size (Diagonal)	82"
Panel Technology	SPVA
Native Resolution	1920 x 1080
Pixel Pitch	0.941mm
Brightness (typical)	600 cd/m ²
Contrast Ratio (typical)	2000:1
Active Screen Area (W X H)	71.1 x 40 in. / 1805.8 x 1015.7mm
CONNECTIVITY	
Input Terminals	DVI-I
RGB1	Composite RCA
Video 1	Composite RCA
Video 2	S-Video
Video 3	HDMI
Video 4	Component BNC
Component Video 1 (DVD/HD)	Audio 1 (MiniJack), Audio 2 and 3 Stereo (RCA), HDMI / Internal Speaker: None
Audio	RS-232 for multiple monitor control, IR
External Control	7W Stereo
Audio Amplifier	
FEATURES	
Additional Features	Advanced thermal capabilities, TileMatrix (4x4), TileComp, Plug and Play, multi-level programmable zoom, video ready, sharpness/softness, vacation switch, AmbiBright, 10-bit gamma
POWER	
Power Requirements	AC 100-120V / AC 220-240 @ 50/60Hz
Power Consumption (typical)	880W
Power Consumption - Standby Mode	15W
PHYSICAL SPECIFICATIONS	
Bezel Width (L/R, T/B)	2.3 in. / 2.3 in., 59mm / 59mm
Dimensions (without stand; WxHxD)	75.8 x 44.8 x 5.9 in. / 1926 x 1137 x 150mm (LCD8205-P; 75.8 x 44.8 x 6.3 in. / 1926 x 1137 x 160mm
Packaging Dimensions (WxHxD)	87.2 x 54.6 x 28 in. / 2216 x 1387 x 710mm
Net Weight (without stand)	319.7 lbs. / 145 kg (LCD8205-P; 374.8 lbs. / 170 kg)
Gross Weight (with box)	458.6 lbs. / 208 kg (LCD8205-P; 513.7 lbs. / 233 kg)
VESA Hole Configuration	638 x 380 x 3mm (8 hole)
ENVIRONMENTAL CONDITIONS	
Operating Temperature	5° - 40°C / 41° - 104°F
Operating Humidity	20 - 80%
ACCESSORIES	
Included	Power cord, user manual, setup sheet, wireless remote control, batteries, CD-ROM
Optional	Protective panel (LCD8205-P), floor stand kit (LCD8205-FSK), hard shipping case with castors (LCD8205-HC)
WARRANTY/SERVICE	
On-Site Limited Warranty	3 years parts and labor, including backlight

* LCD8205-P includes a protective panel

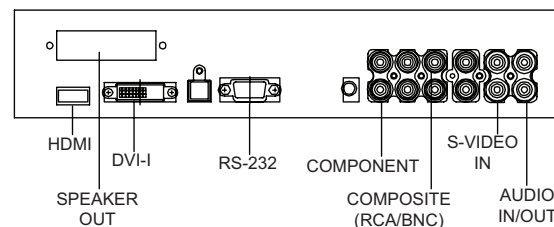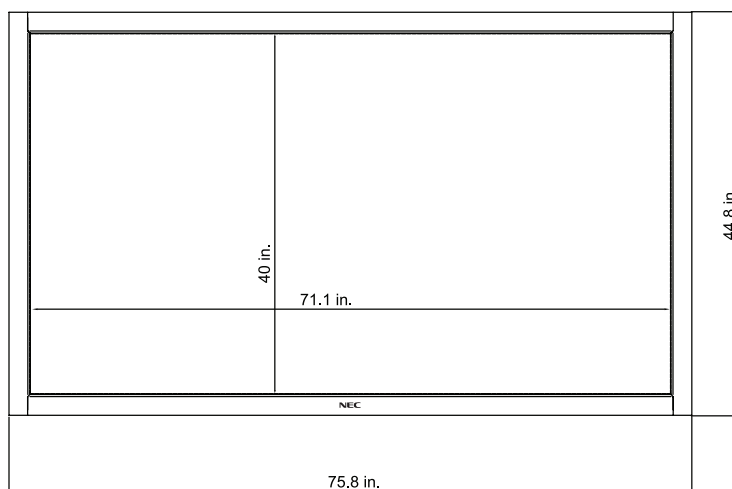

** LCD8205-P